

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 0 526 135 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**06.05.1998 Bulletin 1998/19**

(51) Int Cl.<sup>6</sup>: **G02F 1/1343, G02F 1/1335**

(21) Application number: **92306816.7**

(22) Date of filing: **24.07.1992**

(54) **Liquid crystal display apparatus**

Flüssigkristall-Anzeigevorrichtung

Appareil d'affichage à cristal liquide

(84) Designated Contracting States:  
**AT BE CH DE DK ES FR GB GR IT LI LU NL PT SE**

(30) Priority: **25.07.1991 JP 207273/91**

(43) Date of publication of application:  
**03.02.1993 Bulletin 1993/05**

(73) Proprietor: **CANON KABUSHIKI KAISHA**  
**Tokyo (JP)**

(72) Inventor: **Katakura, Kazunori,**  
**c/o Canon Kabushiki Kaisha**  
**Ohta-ku, Tokyo (JP)**

(74) Representative:  
**Beresford, Keith Denis Lewis et al**  
**BERESFORD & Co.**  
**2-5 Warwick Court**  
**High Holborn**  
**London WC1R 5DJ (GB)**

(56) References cited:  
**EP-A- 0 271 960** **EP-A- 0 322 106**  
**EP-A- 0 361 981** **EP-A- 0 453 033**  
**US-A- 4 812 017**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 0 526 135 B1**

**Description**

The present invention relates to a display apparatus for displaying images and characters and, more particularly, to a matrix display apparatus which divides a pixel into sub-pixels to display multicolor and multi-gradation.

Conventional matrix displaying apparatuses are capable of dividing a single pixel into sub-pixels so that multi-values are displayed using the pixel. As shown in Fig. 12, when the area of a single pixel is divided in a ratio of 3 to 2, the pixel is capable of displaying four values 0%, 40%, 60% and 100%. Also, when the area of a pixel is divided in a ratio of 1:1:1 and red, green and blue color filters are placed over the divided areas, eight colors can be displayed. When pixels are divided in an appropriate ratio, they are capable of displaying  $2^N$  colors or  $2^N$  gradations, where N is the number of pixels divided.

Because each pixel is divided into sub-pixels in the same ratio, when the above conventional apparatus displays a single piece of information using a plurality of pixels, there are a plurality of sub-pixels of the same color and gradation in a single display unit. Therefore, the number of gradations which can be displayed is much fewer than  $2^N$ . In other words, the conventional ratio at which a single pixel is divided into sub-pixels is inappropriate.

EP-A-0361981 describes a display device in which each pixel or display unit is unevenly divided into a number of sub-pixels to allow the gradation or density level of the pixel to be displayed by the display unit to be determined by selecting which ones of the sub-pixels are activated. Each pixel is identically divided into sub-pixels.

EP-A-0322106 describes a display device in which the individual color filter elements for which the eye is more tolerant of a lower resolution are larger than the color filter elements for which the eye requires a higher resolution.

According to one aspect of the present invention there is provided a display apparatus in accordance with claim 1.

The present invention also provides a method in accordance with claim 8.

Embodiments of this invention provide a display device capable of displaying more colors and gradations than in the conventional apparatus when a single piece of information is displayed using a plurality of pixels as a single display unit.

The area of one pixel may be different from that of an adjacent pixel, thus making it possible to make the area of one sub-pixel different from that of another. Alternatively, all pixels may have the same area, and the ratio of dividing one pixel into sub-pixels is made different from that of dividing another. This makes it possible to make the area of one sub-pixel different from that of another.

The display apparatus can be used as a color display apparatus by arranging color filters on the sub-pixels in each pixel. This invention may be applied to liquid crystal display apparatuses, particularly those having crystals, such as ferroelectric crystals, between the scan and information electrodes.

**BRIEF DESCRIPTION OF THE DRAWINGS**

Fig. 1 is a schematic view of a first embodiment of the present invention;  
 Fig. 2 is an enlarged view of a liquid crystal display apparatus shown in Fig. 1;  
 Fig. 3 is a sectional view of the liquid crystal display apparatus shown in Fig. 2;  
 Fig. 4 is a waveform chart of drive signals used by the display apparatus shown in Fig. 1;  
 Fig. 5 is a timing chart showing when the display apparatus transmits the drive signals;  
 Fig. 6 is a schematic view of a second embodiment of this invention;  
 Fig. 7 is an enlarged view of a liquid crystal display apparatus shown in Fig. 6;  
 Fig. 8 is a sectional view of the liquid crystal display apparatus shown in Fig. 7;  
 Fig. 9 is a schematic view of a third embodiment of this invention;  
 Fig. 10 is an enlarged view of a liquid crystal display apparatus shown in Fig. 9;  
 Fig. 11 is a sectional view of the liquid crystal display apparatus shown in Fig. 10; and  
 Fig. 12 is a view showing the conventional method of displaying gradations through the division of a pixel.

**DESCRIPTION OF THE PREFERRED EMBODIMENTS**

Pixels, each composed of one or more sub-pixels, are formed on a matrix electrode including scan and information electrodes. The area of one sub-pixel in one pixel is different from the area of another pixel in an adjacent pixel. The present invention is therefore capable of increasing the number of gradations displayed when a single piece of information is displayed using a plurality of pixels.

**Embodiment 1 and Comparison Example 1**

A description will be given of the first embodiment of this invention, in which the ratio at which one pixel is divided is made different from the ratio at which an adjacent pixel is divided. Thereby the area of one sub-pixel is made different

from the area of another. This makes it possible to display more colors than in the conventional apparatus.

Fig. 1 shows a liquid crystal display apparatus in accordance with the first embodiment of this invention. The display apparatus comprises a liquid crystal display device 101, a scan signal drive circuit 102, an information signal drive circuit 103, a scan signal control circuit 104, and a drive control circuit 105. The display apparatus further comprises an information signal control circuit 106, a thermistor 108 for measuring the temperature of the display device 101, and a temperature sensing circuit 109 for measuring the temperature of the display device 101 on the basis of an output from the thermistor 108. The display device 101 has a matrix electrode composed of scan electrodes 201 and information electrodes 202, both shown in detail in Fig. 2. The information signal drive circuit 103 applies an information signal to the liquid crystal through the information electrodes 202. The information signal includes a plurality of pulses, each having a control phase portion and an auxiliary phase portion. The scan signal drive circuit 102 applies a scan signal to the liquid crystal through the scan electrodes 201. The scan signal has phase pulses which compensate for at least one pulse in the auxiliary phase of the information signal. A ferroelectric liquid crystal is disposed between the scan electrodes 201 and the information electrodes 202. Numeral 107 denotes a graphic controller. Data is transmitted from the graphic controller 107 and input via the drive control circuit 105 to the scan signal control circuit 104 and the information signal control circuit 106. The data is converted into address data by the scan signal control circuit 104 and into display data by the information signal control circuit 106. The temperature of the display device 101 is input through the thermistor 108 to the temperature sensing circuit 109, and then input as temperature data to the scan signal control circuit 104 through the drive control circuit 105. The scan signal drive circuit 102 generates the scan signal in accordance with the address and temperature data and then applies it to the scan electrodes 201 of the display device 101. The information signal drive circuit 103 generates the information signal in accordance with the display data and then applies it to the information electrodes 202 of the display device 101.

Fig. 4 shows the waveform of drive signals (scan and information signals) used by the display apparatus, and Fig. 5 is a timing chart showing when the display apparatus transmits the drive signals.

Fig. 2 shows in detail the liquid crystal display device 101. In Fig. 2, numeral 211 denotes a pixel, serving as a minimum display unit, formed where the scan electrode 201 intersects with the information electrodes 202. All pixels have the same area. A sub-pixels 212, serving as a minimum lighting unit, can be formed inside each pixel by dividing each information electrode 202. Red, green and blue filters 203 are disposed over the sub-pixels. Odd-numbered pixel along the scan electrode 201 are divided into red, green and blue in a ratio of 3/10:3/10:4/10, and even-numbered pixels are divided into red, green and blue in a ratio of 36/100:36/100:28/100. The liquid crystal display device 101 shown in Fig. 1 has 1024 scan electrodes 201 and 3840 (1280 x 3) information electrodes 202. It is provided with 1310720 (1280 x 1024) color pixels, each composed of three sub-pixels.

Fig. 3 is a partial sectional view of the display device 101. Numeral 301 denotes an analyzer, and 307 a polarizer. They are disposed using crossed-Nicol. Numerals 302 and 306 denote glass substrates; 303, a ferroelectric liquid crystal; 304, a protecting film; 305, a light-intercepting metal; and 308, a spacer.

Table 1 shows colors that the display unit has when the graphic controller 107 transmits 1280 x 1024 pieces of information, that is, when one piece of information is transmitted to one pixel. To compare this embodiment with a conventional apparatus, comparison example 1. Table 2 shows colors displayed by the conventional apparatus in which each pixel is divided into red, green and blue in a ratio of 1/3:1/3:1/3. In this case, since each pixel serves as one display unit, each display unit has one sub-pixel on which red, green and blue filters are disposed. Eight colors can be displayed regardless of the ratio at which pixels are divided. The number of displayed colors in this embodiment agrees with that of the comparison example, both conforming to the following equation:

$$2^3 = 8$$

In all Tables a white circuit (○) indicates that the color is lit, whereas a black circuit (○) indicates that the color is not lit.

When the graphic controller 107 transmits 640 x 1024 pieces of information, the number of displayed colors in this embodiment differs from that of the conventional example, the comparison example. In this case, two pixels serve as one display unit. Each display unit of this embodiment has two sub-pixels of different sizes on which red, green and blue filters are disposed, whereas each display unit of the conventional example has two sub-pixels of the same size, on which red, green and blue filters are disposed. Table 3 shows displayed colors of this embodiment, and Table 4 shows those of the conventional example. As seen from Tables 3 and 4, this embodiment is capable of displaying 64 colors compared with 27 colors of the conventional example. The number of displayed colors of this invention is 64, which conforms to the following equation:

$$2^6 = 64$$

In general, the closer the area ratio of sub-pixels in one pixel to that of sub-pixels in an adjacent pixel, the more consistent display is when finely gradated images are displayed and one pixel serves as a display unit. However, displaying gradation is not smooth when non-finely gradated images are displayed and a plurality of pixels serve as a display unit. It is therefore necessary to determine the area of each sub-pixel and the ratio of dividing it into areas when image quality is considered and both finely gradated and non-finely gradated images are displayed.

(Embodiment 2 and Comparison Example 2)

A description will now be given of the second embodiment of this invention, in which the area of one pixel is made different from that of an adjacent pixel, and the area of one sub-pixel is made different from that of another. It is thus possible to display more gradations than in the conventional display apparatus.

Fig. 6 is a schematic view of the second embodiment of this invention. It is the same as the first embodiment except for a liquid crystal display device 601.

Fig. 7 is an enlarged view of the liquid crystal display device 601. Numeral 711 denotes a pixel, serving as a minimum display unit, formed where the scan electrode 201 intersects with the information electrodes 202. Numeral 712 denotes a sub-pixel formed by dividing the information electrode 202 in a ratio of 3:1. In this embodiment, even-numbered pixels along the scan electrode 201 have 90 % area with respect to odd-numbered pixels. The liquid crystal display device 601 has 1024 scan electrodes 711, 2560 (1280 x 2) information electrodes 712 and 1310720 (1280 x 1024) pixels, each composed of two sub-pixels.

Fig. 8 is a partial sectional view of the liquid crystal display device 601. It is substantially the same as the liquid crystal display device of the first embodiment except that the color filter 203, the protecting film 304 and the light-intercepting metal 305 are not provided.

Table 5 shows gradations that the display unit has when the graphic controller 107 transmits 1280 x 1024 pieces of information. For comparison purposes, Table 5 also shows gradations displayed by a conventional apparatus (comparison example 2) in which all pixels have the same area. In such a case, this embodiment and the comparison example have each four gradations, thus conforming to the following equation:

$$2^2 = 4$$

When the graphic controller 107 transmits 640 x 1024 pieces of information, two pixels serve as one display unit. Each display unit has four sub-pixels of different areas, whereas each display unit of the conventional example, comparison example 2, has two sub-pixels of the same area. Table 6 shows displayed colors of this embodiment and the conventional example.

As apparent from Table 6, the conventional example is capable of displaying 9 gradations, while this embodiment is capable of displaying 16 gradations, which conform to the following equation:

$$2^4 = 16$$

(Embodiment 3 and Comparison Example 3)

A description will now be given of the third embodiment of this invention, in which the area of one pixel is made different from that of an adjacent pixel. This makes the area of one sub-pixel different from that of another. It is thus possible to display more gradations than in the conventional display apparatus.

Fig. 9 is a schematic view of the third embodiment of this invention. It is the same as the first embodiment except for a liquid crystal display device 901.

Fig. 10 is an enlarged view of the liquid crystal display device 901. In Fig. 10, numeral 911 denotes a pixel, serving as a minimum display unit, formed where the scan electrode 201 intersects with the information electrode 202. The pixel 911 is a sub-pixel serving as a minimum lighting unit. In this embodiment, odd-numbered pixels along the scan electrode 201 have 90% area with respect to even-numbered pixels. Odd-numbered pixels along the information electrode 202 have 80% area with respect to even-numbered pixels. In other words, the areas of four adjacent pixels are divided in a ratio of 100:90:80:72.

Fig. 11 is a partial sectional view of the liquid crystal display device 901. It is substantially the same as that of the second embodiment.

When the graphic controller 107 transmits 1280 x 1024 pieces of information, each pixel displays only binary values black and white in the same manner as in comparison example 3, conventional example, in which all pixels have the same area.

When the graphic controller 107 transmits 640 x 512 pieces of information, four pixels serve as one display unit having four sub-pixels of different areas. The display unit of the comparison example 3, conventional example, has four sub-pixels of the same area. Table 7 shows displayed colors of this embodiment and the conventional example. where a, b, c and d in Table 7 correspond to sub-pixels a, b, c and d shown in Fig. 10.

As seen from Table 7, the conventional example is capable of displaying 5 gradations, whereas this embodiment is capable of displaying 16 gradations, which conform to the following equation:

$$2^2 = 16$$

As has been described above, the area of one sub-pixel in one pixel is different from that of another sub-pixel in an adjacent pixel. Therefore, this invention is capable of displaying more colors and gradations than the conventional display apparatus when a single piece of information is displayed using a plurality of pixels.

Table 1

DISPLAYED COLOR	EMBODIMENT 1 (ONE PIECE OF INFORMATION FOR ONE PIXEL)											
	ODD-NUMBERED PIXEL						EVEN-NUMBERED PIXEL					
	LIGHT STATUS			GRADATION (%)			LIGHT STATUS			GRADATION (%)		
	RED (30%)	GREEN (30%)	BLUE (40%)	RED	GREEN	BLUE	RED (36%)	GREEN (36%)	BLUE (28%)	RED	GREEN	BLUE
1	⊙	⊙	⊙	0	0	0	⊙	⊙	⊙	0	0	0
2	○	⊙	⊙	30	0	0	○	○	○	36	0	0
3	⊙	○	⊙	0	30	0	○	○	○	0	36	0
4	○	○	⊙	30	30	0	○	○	⊙	36	36	0
5	⊙	⊙	○	0	0	40	⊙	⊙	○	0	0	28
6	○	⊙	○	30	0	40	○	○	○	36	0	28
7	⊙	○	○	0	30	40	○	○	○	0	36	28
8	○	○	○	30	30	40	○	○	○	36	36	28

Table 2

DISPLAYED COLOR	COMPARISON EXAMPLE 1 (ONE PIECE OF INFORMATION FOR ONE PIXEL)					
	LIGHT STATUS			GRADATION (%)		
	RED	GREEN	BLUE	RED	GREEN	BLUE
1	●	●	●	0	0	0
2	○	●	●	33.3	0	0
3	●	○	●	0	33.3	0
4	○	○	●	33.3	33.3	0
5	●	●	○	0	0	33.3
6	○	●	○	33.3	0	33.3
7	●	○	○	0	33.3	33.3
8	○	○	○	33.3	33.3	33.3

Table 3

DISPLAYED COLOR	EMBODIMENT 1 (ONE PIECE OF INFORMATION FOR TWO PIXELS)								
	LIGHT STATUS						GRADATION (%)		
	ODD-NUMBERED PIXEL			EVEN-NUMBERED PIXEL			RED	GREEN	BLUE
	RED (15%)	GREEN (15%)	BLUE (20%)	RED (18%)	GREEN (18%)	BLUE (14%)			
1	●	●	●	●	●	●	0	0	0
2	○	●	●	●	●	●	15	0	0
3	●	○	●	●	●	●	0	15	0
4	○	○	●	●	●	●	15	15	0
5	●	●	○	●	●	●	0	0	20
6	○	●	○	●	●	●	15	0	20
7	●	○	○	●	●	●	0	15	20
8	○	○	○	●	●	●	15	15	15
9	●	●	●	○	●	●	18	0	0
10	○	●	●	○	●	●	33	0	0
11	●	○	●	○	●	●	18	15	0
12	○	○	●	○	●	●	33	15	0
13	●	●	○	○	●	●	18	0	20
14	○	●	○	○	●	●	33	0	20
15	●	○	○	○	●	●	18	15	20
16	○	○	○	○	●	●	33	15	20
17	●	●	●	●	○	●	0	18	0
18	○	●	●	●	○	●	15	18	0
19	●	○	●	●	○	●	0	33	0
20	○	○	●	●	○	●	15	33	0
21	●	●	○	●	○	●	0	18	20
22	○	●	○	●	○	●	15	18	20
23	●	○	○	●	○	●	0	33	20
24	○	○	○	●	○	●	15	33	20
25	●	●	●	●	○	●	18	18	0
26	○	●	●	●	○	●	33	18	0
27	●	○	●	●	○	●	18	33	0
28	○	○	●	●	○	●	33	33	0
29	●	●	○	●	○	●	18	18	20
30	○	●	○	●	○	●	33	18	20
31	●	○	○	●	○	●	18	33	20
32	○	○	○	●	○	●	33	33	20

Table 3 (continued)

5  
---



Table 4

DISPLAYED COLOR	COMPARISON EXAMPLE 1 (ONE PIECE OF INFORMATION FOR TWO PIXELS)								
	LIGHT STATUS						GRADATION (%)		
	ODD-NUMBERED PIXEL			EVEN-NUMBERED PIXEL			RED	GREEN	BLUE
	RED (16.7%)	GREEN (16.7%)	BLUE (16.7%)	RED (16.7%)	GREEN (16.7%)	BLUE (16.7%)			
1	●	●	●	●	●	●	0	0	0
2	○	●	●	●	●	●	16.7	0	0
3	●	○	●	●	●	●	0	16.7	0
4	○	○	●	●	●	●	16.7	16.7	0
5	●	●	○	●	●	●	0	0	16.7
6	○	●	○	●	●	●	16.7	0	16.7
7	●	○	○	●	●	●	0	16.7	16.7
8	○	○	○	●	●	●	16.7	16.7	16.7
9	○	●	●	○	●	●	33.3	0	0
10	○	○	●	○	●	●	33.3	16.7	0
11	○	●	○	○	●	●	33.3	0	16.7
12	○	○	○	○	●	●	33.3	16.7	16.7
13	●	○	●	●	○	●	0	33.3	0
14	○	○	●	●	○	●	16.7	33.3	0
15	●	○	○	●	○	●	0	33.3	16.7
16	○	○	○	●	○	●	16.7	33.3	16.7
17	○	○	●	○	○	●	33.3	33.3	0
18	○	○	○	○	○	●	33.3	33.3	16.7
19	●	●	○	●	●	○	0	0	33.3
20	○	●	○	●	●	○	16.7	0	33.3
21	●	○	○	●	●	○	0	16.7	33.3
22	○	○	○	●	●	○	16.7	16.7	33.3
23	○	●	○	○	●	○	33.3	0	33.3
24	○	○	○	○	●	○	33.3	16.7	33.3
25	●	○	○	●	○	○	0	33.3	33.3
26	○	○	○	●	○	○	16.7	33.3	33.3
27	○	○	○	○	○	○	33.3	33.3	33.3

Table 5

DISPLAYED GRADATION	EMBODIMENT 2								COMPARISON EXAMPLE 2		
	ODD-NUMBERED PIXEL				EVEN-NUMBERED PIXEL						
	LIGHT STATUS		GRADA-TION		LIGHT STATUS		GRADA-TION		LIGHT STATUS		GRADA-TION
	75 %	25 %	75 %	25 %	75 %	25 %	75 %	25 %	75 %	25 %	
1	●	●	0		●	●	0		●	●	0
2	●	○	25		●	○	25		●	○	25
3	○	●	75		○	●	75		○	●	75
4	○	○	100		○	○	100		○	○	100

5	DISPLAYED GRADATION	EMBODIMENT 2					COMPARISON EXAMPLE 2				
		LIGHT STATUS				GRADATION	LIGHT STATUS				GRADATION
		ODD-NUMBERED PIXEL		EVEN-NUMBERED PIXEL							
		39.5%	13.2%	35.5%	11.8%		37.5%	12.5%	37.5%	12.5%	
10	1	●	●	●	●	0	●	●	●	●	0
	2	●	●	●	○	11.8	●	●	●	○	12.5
	3	●	○	●	●	13.2	●	○	●	○	25
15	4	●	○	●	○	25	●	●	○	●	37.5
	5	●	●	○	●	35.5	●	●	○	○	50
	6	○	●	●	●	39.5	●	○	○	○	62.5
20	7	●	●	○	○	47.3	○	●	○	●	75
	8	●	○	○	●	48.7	○	●	○	○	87.5
	9	○	●	●	○	51.3	○	○	○	○	100
25	10	○	○	●	●	52.7					
	11	●	○	○	○	60.5					
	12	○	○	●	○	64.5					
30	13	○	●	○	●	75					
	14	○	●	○	○	86.8					
	15	○	○	○	●	88.2					
35	16	○	○	○	○	100					

Table 7

DISPLAYED GRADATION	EMBODIMENT 3					COMPARISON EXAMPLE 3				
	LIGHT STATUS				GRADATION (%)	LIGHT STATUS				GRADATION (%)
	a	b	c	d		25%	25%	25%	25%	
1	●	●	●	●	0	●	●	●	●	0
2	●	●	●	○	21.1	●	●	●	○	25
3	●	●	○	●	23.4	●	●	○	○	50
4	●	○	●	●	26.3	●	○	○	○	75
5	○	●	●	●	29.2	○	○	○	○	100
6	●	●	○	○	44.5					
7	●	○	●	○	47.4					
8	●	○	○	●	49.7					
9	○	●	●	○	50.3					
10	○	●	○	●	52.6					
11	○	○	●	●	55.5					
12	●	○	○	○	70.8					
13	○	●	○	○	73.7					
14	○	○	●	○	76.6					
15	○	○	○	●	78.9					
16	○	○	○	○	100					

## Claims

1. A colour display apparatus comprising an array of rows and columns of pixel display areas disposed adjacent one another, and an array of scanning and signal electrodes for addressing said pixel display areas, each pixel display area defining a minimum display unit of the colour display apparatus and comprising a red display area, a green display area and a blue display area, and wherein each colour display area is individually addressable by a scanning electrode and a signal electrode to enable different colours to be displayed by each pixel display area in accordance with signals supplied by the associated scanning and signal electrodes, characterised in that the same scanning electrode is used in the addressing of each colour display area of a given pixel display area; in that corresponding colour display areas of adjacent pixel display areas have different areas; and in that means is provided for controlling the operation of the colour display apparatus so that, in at least one mode of operation, adjacent pixel display areas are combined to form a single display unit thereby increasing the possible number of colours capable of being displayed by the single display unit.
2. A colour display apparatus according to claim 1, wherein adjacent pixel display areas have different areas.

3. A colour display apparatus according to claim 1 or 2, wherein a ratio at which one pixel display area is divided into colour display areas is different from a ratio at which the adjacent pixel display area is divided into colour display areas.
- 5 4. A colour display apparatus according to claim 1, 2 or 3, wherein the ratios of areas of said colour display areas in odd and even rows of pixel display areas are different.
5. A colour display apparatus according to any one of the preceding claims, wherein a liquid crystal is interposed between the scanning and signal electrodes.
- 10 6. A colour display apparatus according to claim 5, wherein the liquid crystal is a ferroelectric liquid crystal.
7. A display apparatus according to any one of the preceding claims, wherein said adjacent pixel display areas are arranged in one of said rows.
- 15 8. A method of operating a colour display apparatus comprising an array of rows and columns of pixel display areas disposed adjacent one another, and an array of scanning and signal electrodes for addressing said pixel display areas, each pixel display area defining a minimum display unit of the colour display and comprising a red display area, a green display area and a blue display area, and wherein each colour pixel area is individually addressable by a scanning electrode and a signal electrode to enable different colours to be displayed by each pixel display area in accordance with signals supplied by the associated scanning and signal electrodes and corresponding colour display areas of adjacent pixel display areas having different areas, which method comprises the steps of using the same scanning electrode to address each colour display area of a given pixel display area and controlling the supply of signals to the scanning and signal electrodes so that, in at least one mode of operation, adjacent pixel display areas are combined to form a single display unit thereby increasing the possible number of colours capable of being displayed by the single display unit.
- 20
- 25

#### Patentansprüche

- 30 1. Farbanzeigevorrichtung mit einer Anordnung von Zeilen und Spalten nebeneinander angeordneter Bildpunktanzeigebereiche, und einer Anordnung von Abtast- und Signalelektroden zum Adressieren der Bildpunktanzeigebereiche, wobei jeder Bildpunktanzeigebereich eine minimale Anzeigeeinheit der Farbanzeigevorrichtung definiert und einen roten Anzeigebereich, einen grünen Anzeigebereich und einen blauen Anzeigebereich aufweist, und wobei jeder Farbanzeigebereich durch eine Abtastelektrode und eine Signalelektrode individuell adressierbar ist, um ein Anzeigen verschiedener Farben durch jeden Bildpunktanzeigebereich in Übereinstimmung mit durch die zugehörigen Abtast- und Signalelektroden zugeführten Signalen zu ermöglichen,  
**dadurch gekennzeichnet, daß**  
bei der Adressierung eines jeden Farbanzeigebereichs eines gegebenen Bildpunktanzeigebereichs die gleiche Abtastelektrode verwendet wird; daß entsprechende Farbanzeigebereiche benachbarter Bildpunktanzeigebereiche unterschiedliche Flächen aufweisen; und daß eine Einrichtung vorgesehen ist zum Steuern des Betriebs der Farbanzeigevorrichtung in der Weise, daß, in zumindest einer Betriebsart, benachbarte Bildpunktanzeigebereiche zum Bilden einer einzelnen Anzeigeeinheit zusammengefaßt werden, um dadurch die mögliche Zahl von mittels der einzelnen Anzeigeeinheit anzeigbaren Farben zu erhöhen.
- 40 2. Farbanzeigevorrichtung nach Anspruch 1, wobei benachbarte Bildpunktanzeigebereiche unterschiedliche Flächen aufweisen.
3. Farbanzeigevorrichtung nach Anspruch 1 oder 2, wobei ein Verhältnis, in dem ein Bildpunktanzeigebereich in Farbanzeigebereiche aufgeteilt wird von einem Verhältnis abweicht, in dem der benachbarte Bildpunktanzeigebereich in Farbanzeigebereiche aufgeteilt wird.
- 50 4. Farbanzeigevorrichtung nach Anspruch 1, 2 oder 3, wobei die Verhältnisse der Flächen der Farbanzeigebereiche in ungeradzahligem und geradzahligem Zeilen der Bildpunktanzeigebereiche unterschiedlich sind.
- 55 5. Farbanzeigevorrichtung nach einem der vorgenannten Ansprüche, wobei ein Flüssigkristall zwischen den Abtast- und Signal-elektroden angeordnet ist.

6. Farbanzeigevorrichtung nach Anspruch 5, wobei das Flüssigkristall ein ferroelektrisches Flüssigkristall ist.
7. Anzeigevorrichtung nach einem der vorgenannten Ansprüche, wobei die benachbarten Bildpunktanzeigebereiche in einer der Zeilen angeordnet sind.
8. Verfahren zum Betreiben einer Farbanzeigevorrichtung mit einer Anordnung von Zeilen und Spalten nebeneinander angeordneter Bildpunktanzeigebereiche, und einer Anordnung von Abtast- und Signalelektroden zum Adressieren der Bildpunktanzeigebereiche, wobei jeder Bildpunktanzeigebereich eine minimale Anzeigeeinheit der Farbanzeige definiert und einen roten Anzeigebereich, einen grünen Anzeigebereich und einen blauen Anzeigebereich aufweist, und wobei jeder Farbanzeigebereich durch eine Abtastelektrode und eine Signalelektrode individuell adressierbar ist, um ein Anzeigen verschiedener Farben durch jeden Bildpunktanzeigebereich in Übereinstimmung mit durch die zugehörigen Abtast- und Signalelektroden zugeführten Signalen und entsprechenden Farbanzeigebereichen benachbarter Bildpunktanzeigebereiche unterschiedlicher Flächen zu ermöglichen, wobei das Verfahren die Schritte umfaßt des Verwendens der gleichen Abtastelektrode zum Adressierung eines jeden Farbanzeigebereichs eines gegebenen Bildpunktanzeigebereichs und des Steuerns des Zuführens von Signalen zu den Abtast- und Signalelektroden in der Weise, daß, in zumindest einer Betriebsart, benachbarte Bildpunktanzeigebereiche zum Bilden einer einzelnen Anzeigeeinheit zusammengefaßt werden, um dadurch die mögliche Zahl von mittels der einzelnen Anzeigeeinheit anzeigbaren Farben zu erhöhen.

## Revendications

1. Appareil d'affichage en couleurs comprenant un réseau de rangées et colonnes de zones d'affichage de pixel disposées adjacentes les unes aux autres, et un réseau d'électrodes de balayage et de signal pour l'adressage desdites zones d'affichage de pixel, chaque zone d'affichage de pixel définissant une unité d'affichage minimum de l'appareil d'affichage en couleurs et comprenant une zone d'affichage rouge, une zone d'affichage verte et une zone d'affichage bleue, et dans lequel chaque zone d'affichage en couleurs peut être adressée individuellement par une électrode de balayage et une électrode de signal pour permettre à différentes couleurs d'être affichées par chaque zone d'affichage de pixel en fonction de signaux appliqués par les électrodes associées de balayage et de signal, caractérisé en ce que la même électrode de balayage est utilisée pour l'adressage de chaque zone d'affichage en couleurs d'une zone donnée d'affichage de pixel ; en ce que des zones correspondantes d'affichage en couleurs de zones adjacentes d'affichage de pixel comportent des zones différentes ; et en ce qu'un moyen est utilisé pour commander le fonctionnement de l'appareil d'affichage en couleurs de telle sorte qu'au moins dans un mode de fonctionnement, des zones adjacentes d'affichage de pixel sont combinées pour former une seule unité d'affichage afin d'accroître le nombre possible de couleurs capables d'être affichées par la seule unité d'affichage.
2. Appareil d'affichage en couleurs selon la revendication 1, dans lequel des zones adjacentes d'affichage de pixel comportent différentes zones.
3. Appareil d'affichage en couleurs selon la revendication 1 ou 2, dans lequel le rapport selon lequel une zone d'affichage de pixel est divisée en zones d'affichage en couleurs est différent du rapport selon lequel la zone adjacente d'affichage de pixel est divisée en zones d'affichage en couleurs.
4. Appareil d'affichage en couleurs selon la revendication 1, 2 ou 3, dans lequel les rapports de zones desdites zones d'affichage en couleurs dans des rangées impaires et paires de zones d'affichage de pixel, sont différents.
5. Appareil d'affichage en couleurs selon l'une quelconque des revendications précédentes, dans lequel un cristal liquide est interposé entre les électrodes de balayage et de signal.
6. Appareil d'affichage en couleurs selon la revendication 5, dans lequel le cristal liquide est un cristal liquide ferro-électrique.
7. Appareil d'affichage selon l'une quelconque des revendications précédentes, dans lequel lesdites zones adjacentes d'affichage de pixel sont disposées dans l'une desdites rangées.
8. Procédé de fonctionnement d'un appareil d'affichage en couleurs comprenant un réseau de rangées et colonnes de zones d'affichage de pixel disposées adjacentes les unes aux autres, et un réseau d'électrodes de balayage

et de signal pour l'adressage desdites zones d'affichage de pixel, chaque zone d'affichage de pixel définissant une unité d'affichage minimum de l'affichage en couleurs et comprenant une zone d'affichage rouge, une zone d'affichage verte et une zone d'affichage bleue, et dans lequel chaque zone de pixel en couleurs peut être adressée individuellement par une électrode de balayage et une électrode de signal pour permettre à différentes couleurs d'être affichées par chaque zone d'affichage de pixel en fonction de signaux appliqués par les électrodes associées de balayage et de signal et des zones correspondantes d'affichage en couleurs de zones adjacentes d'affichage de pixel ayant différentes zones, ce procédé comprenant les étapes d'utilisation de la même électrode de balayage pour adresser chaque zone d'affichage en couleurs d'une zone donnée d'affichage de pixel et de commande de l'application de signaux aux électrodes de balayage et de signal de telle sorte que dans au moins un mode de fonctionnement, des zones adjacentes d'affichage de pixel sont combinées pour former une seule unité d'affichage afin d'accroître le nombre de couleurs capables d'être affichées par la seule unité d'affichage.

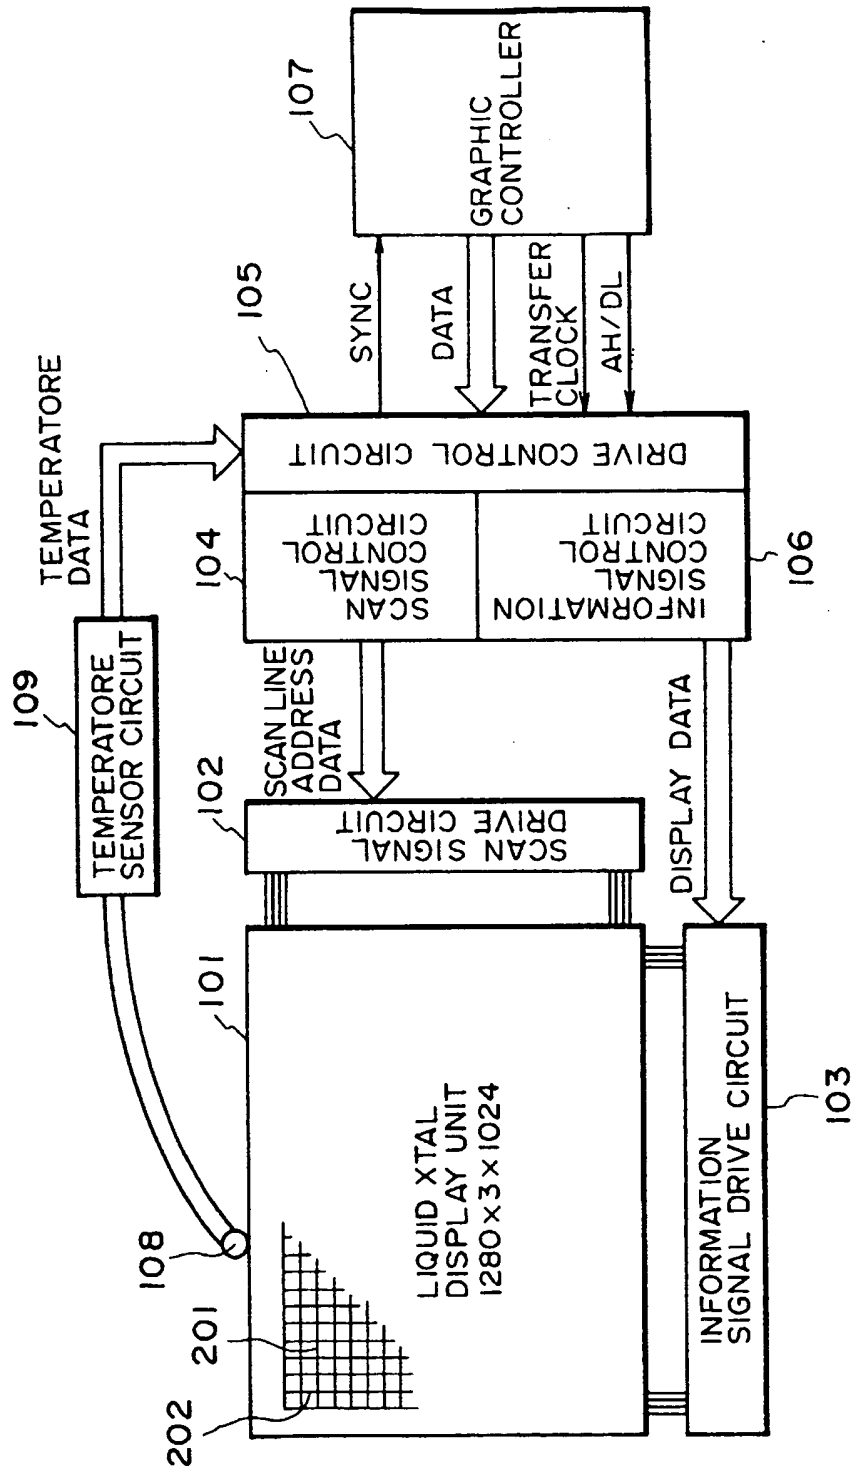


FIG. 1



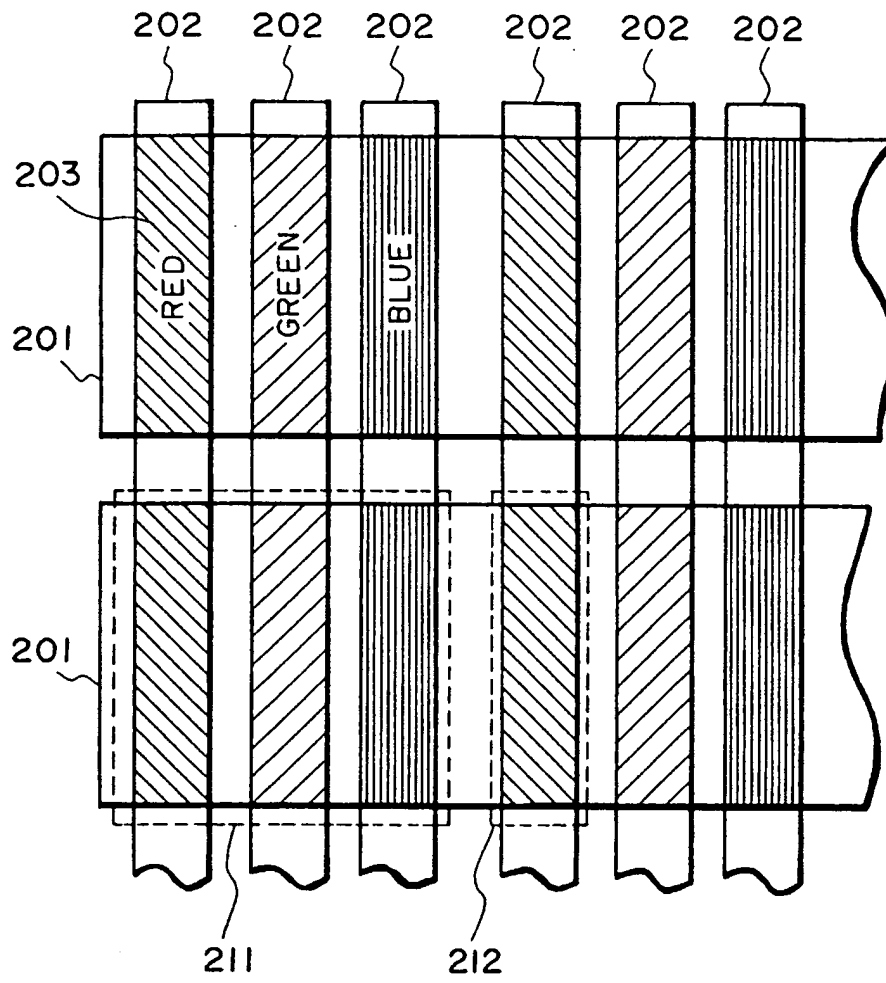


FIG. 2

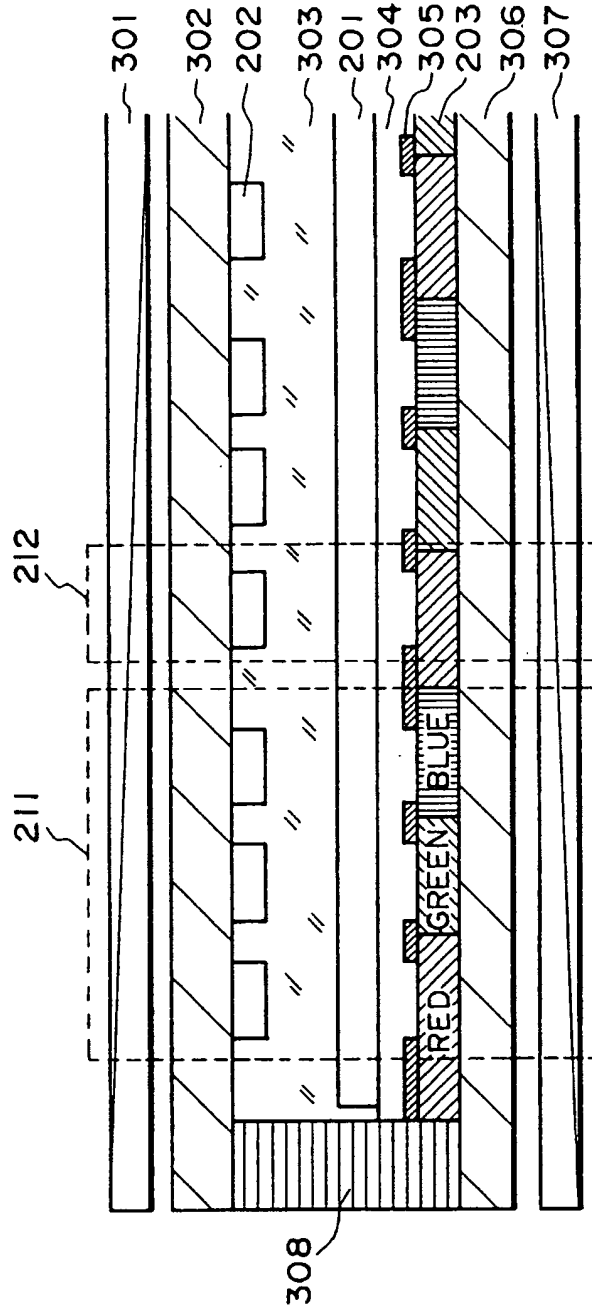


FIG. 3


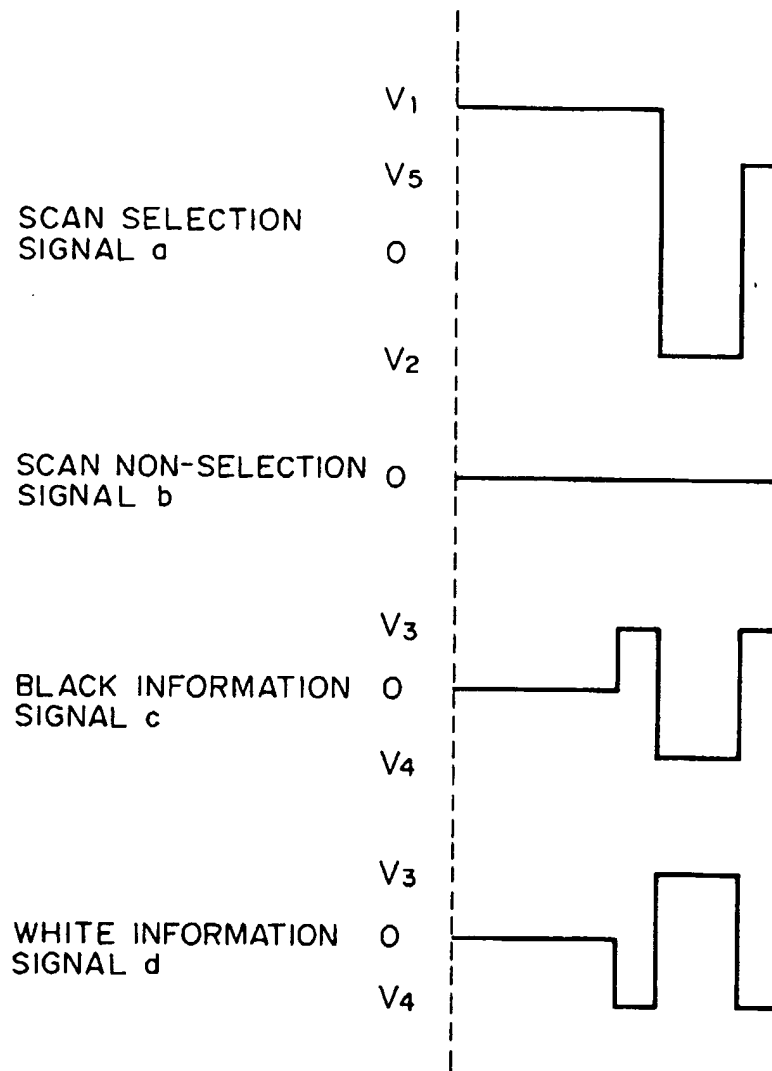


FIG. 4

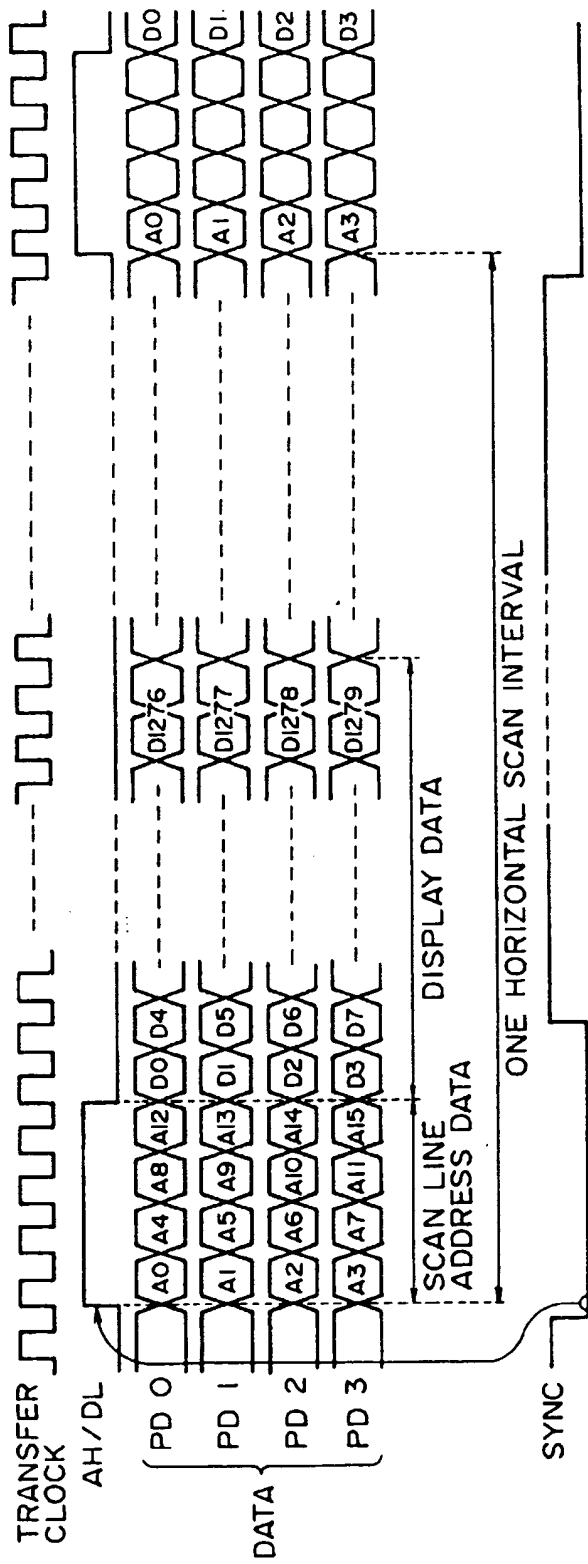

564

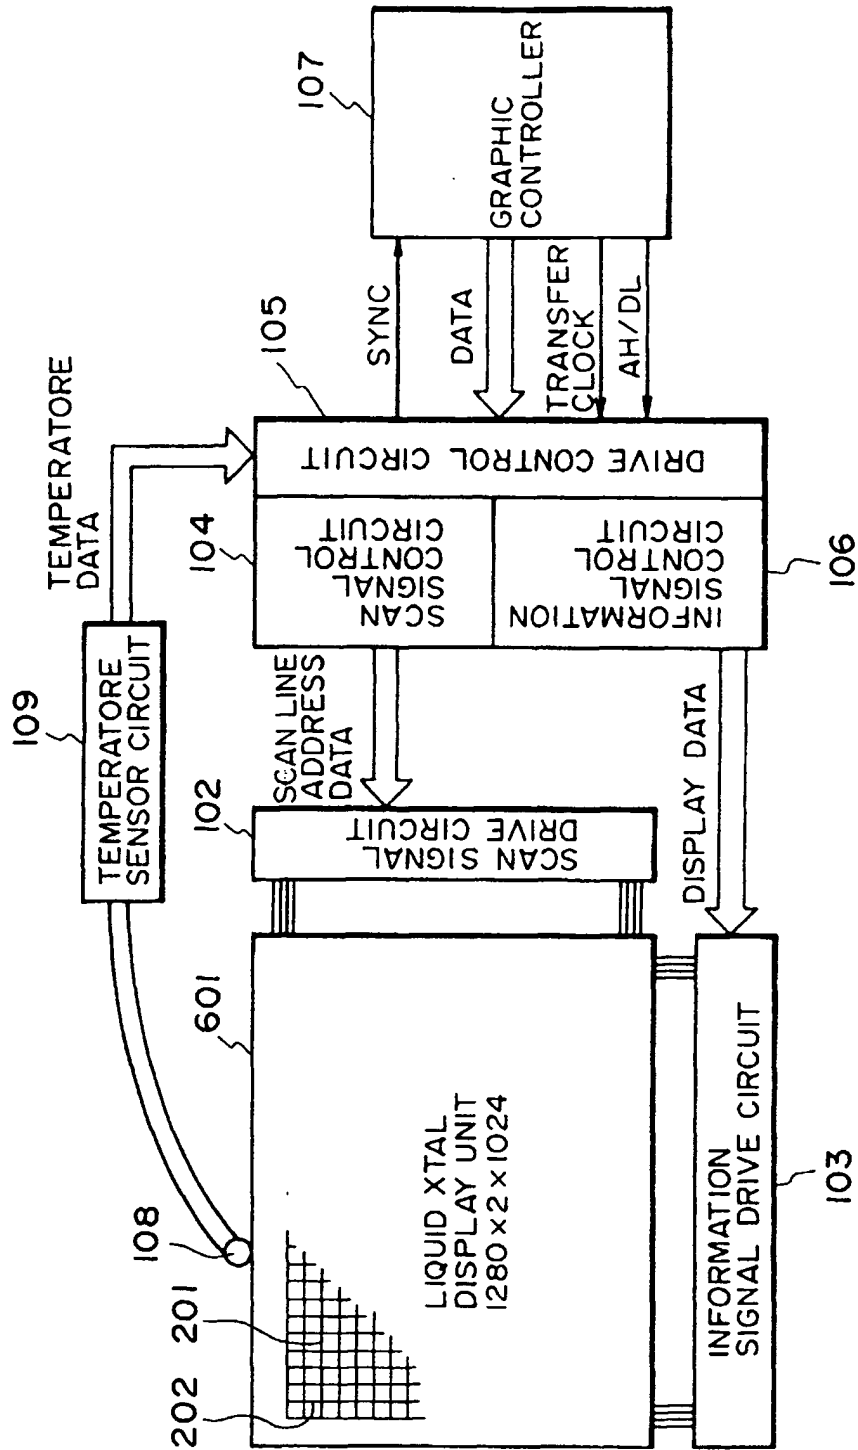


FIG. 6

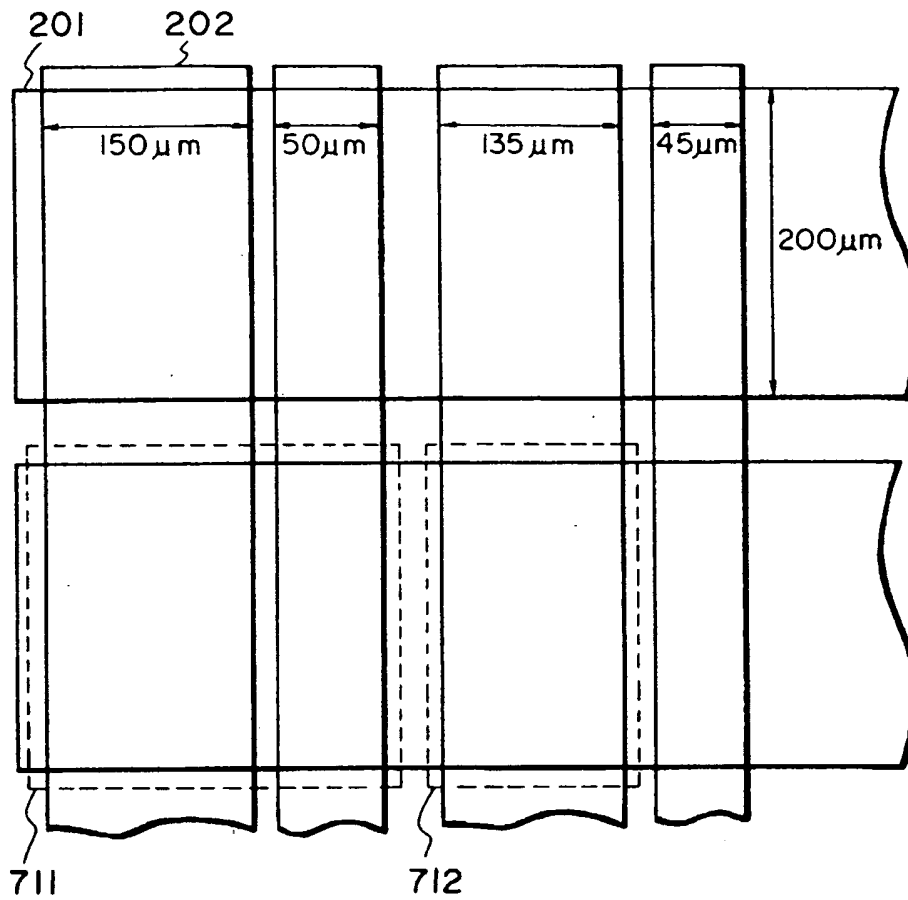


FIG. 7

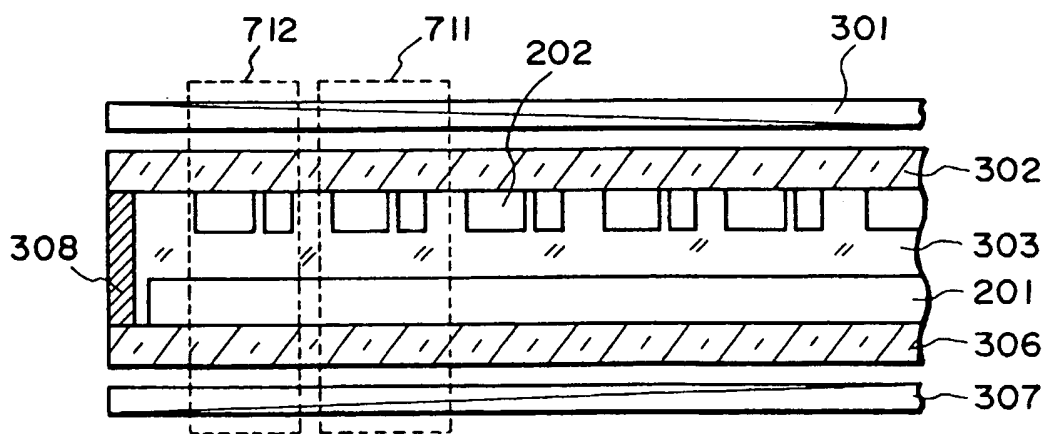


FIG. 8

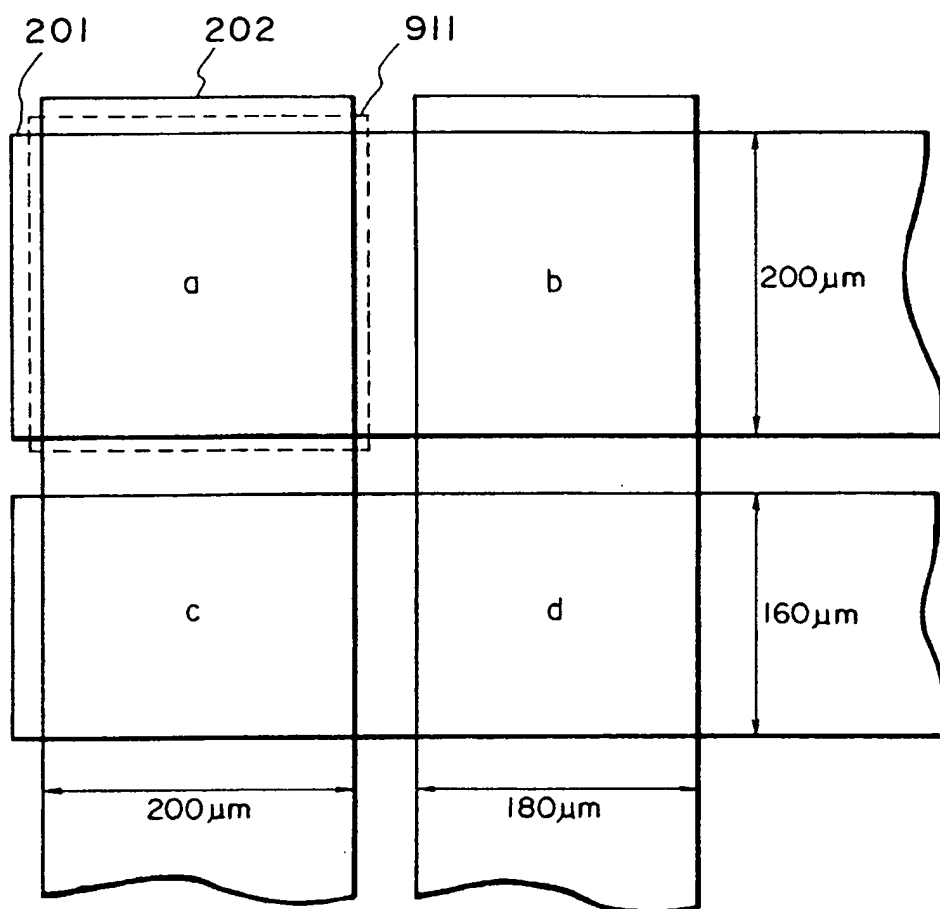


FIG. 10

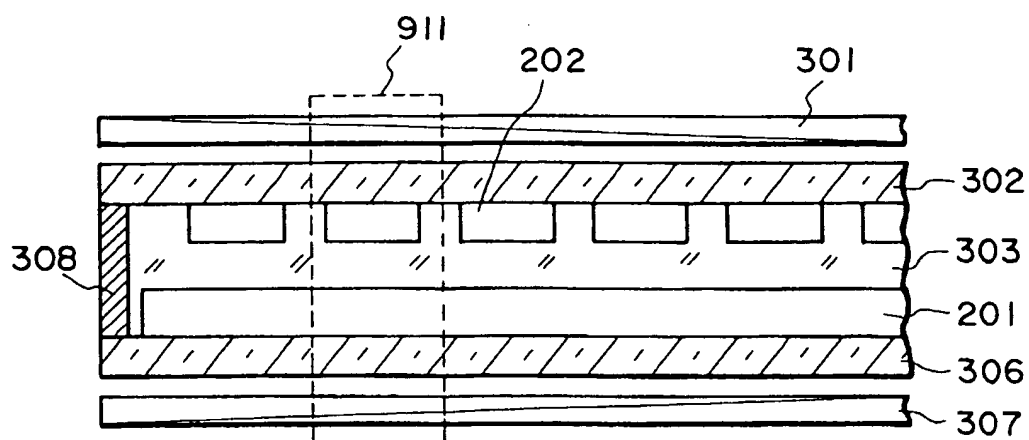


FIG. 11

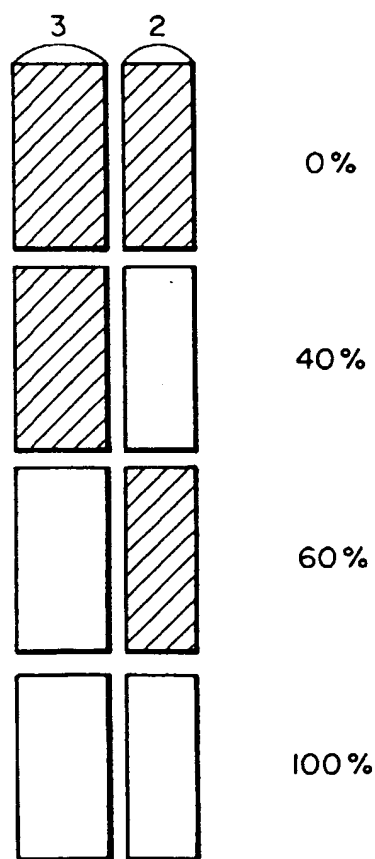


FIG. 12